


AVAILABLE MODELS:

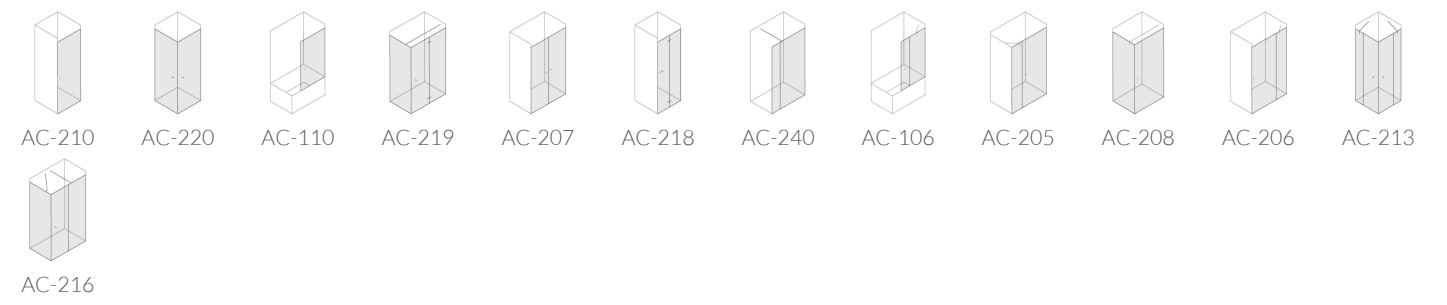

COMMON FEATURES OF THE SERIES:

- Bathtub and shower enclosure with hinged or bifold models. Possibility of outward or inward opening for hinged models. Inward and outward opening for bifold models (interior bifold).
- 6 mm safety glass.
- Profile finishes in White, Polished Silver, Chrome and Black.
- For configurations with fixed panel multi-position stabilizer bars in Chrome and Black finish included.
- Sofia knob comes standard for bifold models. Siena handle for bifold models. Knob and handle available in Chrome and Black.
- Panel compensation: 20 mm. Fixed panel compensation: 15 mm.
- Equipped with magnetic or contact lock according to configuration.
- Opening with panel lift.
- Folding models with magnetic hinge that ensures 180° panel alignment.
- Please refer to series optional accessories.
- Teknoclean as standard.

FINISHES:

- Anodized profiles in white y black.

COMPOSITION/MATERIALS:

Profiles: .....Aluminium. Alloy 6063  
Metallic pieces: .....Zamak, Steel  
Chromed plastic covers: .....ABS  
Transparent plastic lids: .....ABS  
Rollers: .....Steel ball bearings, brass inside track, POM outside track  
Seals: .....PVC

TESTS:

The ARCOIRIS PLUS collection complies with the European standard EN 14428, exceeding all the tests stipulated therein, as detailed below.

| Characteristic to be tested            | Assessment method                                                   | Compliance criteria                                                       | Apt |
|----------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------|-----|
| Cleanability                           | Visual examination. (4.2)                                           | Free from sharp corners, edges and burrs. (4.2)                           | ✓   |
| Impact resistance / shatter properties | R100, 40 particles minimum. (5.1, 5.2)                              | Thermally toughened safety glass. (4.3)                                   | ✓   |
| Corrosion resistance                   | 240 hours in salt spray. (4.4.2)                                    | Corrosion-proof. (4.4.2)                                                  | ✓   |
| Resistance to chemicals and stains     | Reagents: acids, alkalis, alcohols,bleaches, staining agents. (5.3) | Not showing permanent staining or deterioration. (4.4.3)                  | ✓   |
| Resistance to wet and dry cycling      | Wet and dry 50 cycles. (5.4)                                        | Not showing any cracks, crazing or discoloration after 50 cycles. (4.4.4) | ✓   |
| Endurance                              | 20.000 closing-opening cycles. (5.5)                                | Not showing any functional deterioration. (4.4.5)                         | ✓   |
| Stability                              | Resistance to impact. (5.6)                                         | Resists the impact without any functional deterioration. (4.4.6)          | ✓   |
| Water retention                        | Watertightness. (5.7)                                               | Retains water. (4.4.7)                                                    | ✓   |

QUALITY CERTIFICATES:



MODEL EXAMPLE:

