


AVAILABLE MODELS:



DU-211



DU-221



DU-212



DU-219

COMMON FEATURES OF THE SERIES:

- Bathtub and shower enclosure with bifold and sliding panels.
- 3 mm safety glass. 6 mm fixed panels and following.
- Possibility of production in acrylic.
- Profile finishes in White, Silver and Polished Silver.
- Gante handle in chrome.
- 30 mm profile offset on each side.
- Equipped with magnetic lock (except model DU-211, with watertight rubbers).
- Double bearing in upper and lower guides.
- Angled enclosure model with double functionality, bifold and sliding panels with large entrance space.
- Front models allow fixing by pressure without drilling the wall.
- Reversible enclosure. (See warnings).
- See series optional accessories.
- Teknoclean as an option.

FINISHES:

- Anodized profiles in white.

COMPOSITION/MATERIALS:

Profiles:Aluminium. Alloy 6063

Metallic pieces:Zamak, Steel

Chromed plastic covers:ABS

Transparent plastic lids:ABS

Rollers:Steel ball bearings, brass inside track, POM outside track

Seals:PVC

TESTS:

The DUNA collection complies with the European standard EN 14428, exceeding all the tests stipulated therein, as detailed below.

Characteristic to be tested	Assessment method	Compliance criteria	Apt
Cleanability	Visual examination. (4.2)	Free from sharp corners, edges and burrs. (4.2)	✓
Impact resistance / shatter properties	R100, 40 particles minimum. (5.1, 5.2)	Thermally toughened safety glass. (4.3)	✓
Corrosion resistance	240 hours in salt spray. (4.4.2)	Corrosion-proof. (4.4.2)	✓
Resistance to chemicals and stains	Reagents: acids, alkalis, alcohols, bleaches, staining agents. (5.3)	Not showing permanent staining or deterioration. (4.4.3)	✓
Resistance to wet and dry cycling	Wet and dry 50 cycles. (5.4)	Not showing any cracks, crazing or discoloration after 50 cycles. (4.4.4)	✓
Endurance	20.000 closing-opening cycles. (5.5)	Not showing any functional deterioration. (4.4.5)	✓
Stability	Resistance to impact. (5.6)	Resists the impact without any functional deterioration. (4.4.6)	✓
Water retention	Watertightness. (5.7)	Retains water. (4.4.7)	✓

QUALITY CERTIFICATES:



MODEL EXAMPLE:




PRODUCT DATA SHEET

WARNINGS!

- / Maximum height of acrylic enclosures 2000 mm. Maximum height of glass enclosures 2200 mm.
- / Angled profile available after technical feasibility study.
- / Acrylic fixed junction panels are profiled all around the perimeter. In glass fixed panels, only the vertical sides are profiled.
- / Towel rails only available for glass fixed junction panels from 600 mm upwards.
- / Duna series is reversible when the glass is not decorated nor side fixed panel.
- / The flush shower tray may cause a change in the dimension of the enclosure.
- / Minimum glass width for Imagik 250 mm.
- / Customized Imagik. Please check the technical feasibility of your proposal.
- / Any glass larger than 1200 mm or guides and profiles larger than 2200 mm, will mean an additional increase in price due to special logistic conditions. See "price increases"
- / For 1500 mm bathtub height NO price increase will be applied.
- / VAT not included.

Technical details

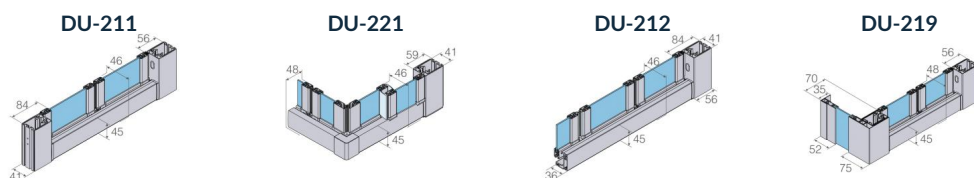

*The plans and dimensions shown correspond to the standard product configuration. Any modification to the configuration may affect these dimensions.