Isla


PRODUCT DATA SHEET

profiltek®

COMMON FEATURES OF THE SERIES:

- Extra-flat resin tray with mineral fillers.
- Stone texture.
- Anti-bacterial and Anti-slip Grade 3.
- Eco-friendly material: ECO resin with 20% recycled PET from recycled plastic bottles.
- Possibility of cut to measure.
- Gratings are supplied in the same colour as the shower tray.
- Multiple finishes and options to choose from.
- Mass-colored (except RAL).
- High-flow drain valve included (90 Ø mm.). Q=0,7l/s.
- 3 cm height.

DIMENSIONS (CM):

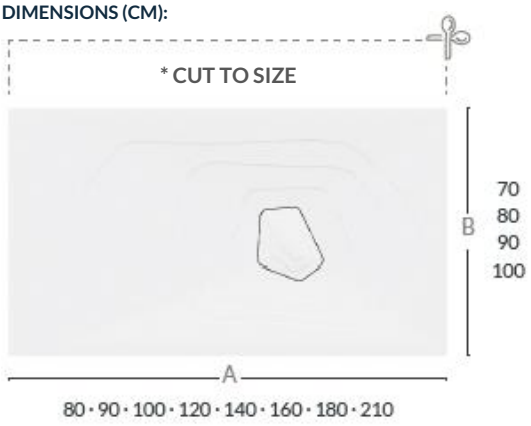

3 cm height | w = 52kg/m2

TEXTURES:



Smooth Solidtek

COLOURS:


White | Black | RAL 7040 Grey | RAL 1015 Cream | RAL 7016 Anthracite | RAL 7047 Pearl

RAL 7030 Zinc | RAL 1019 Moka | Optional RAL finish

GRATES:

Resin grating

DRAINS:

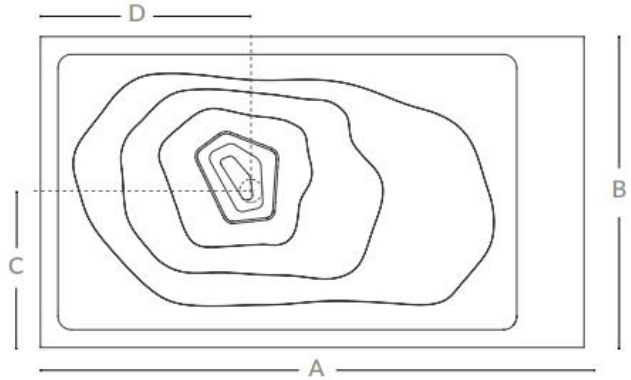


POSICIÓN DEL DESAGÜE · Position de la bonde · Posição do escoamento · Drain position	
A	D
100-130	50*
131-170	61
171-210	75

C
B/2


*** The topographic line pattern varies according to the width and length of the tray. On square products the drain is in the centre**

Dimensions in CM

DRAIN VALVE INCLUDED:

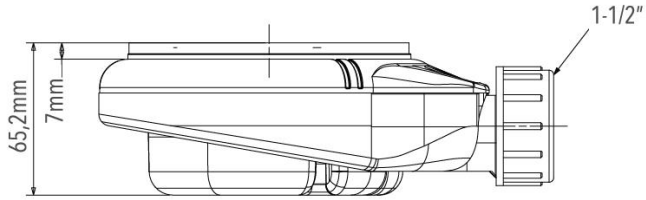

TRAY SECTION:

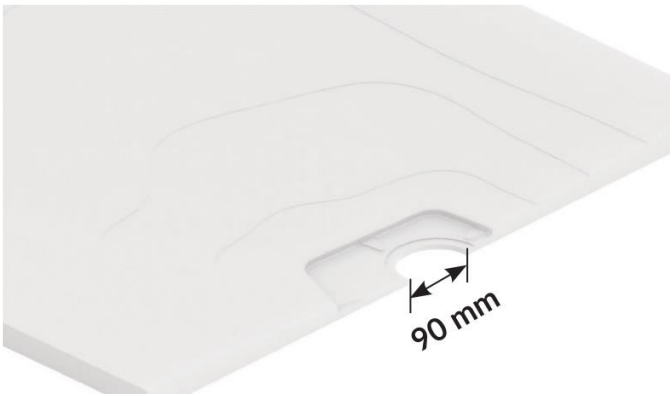

QUALITY CERTIFICATES:

UNE-EN 14428:2016 Mamparas de baño | Declaración de conformidad CE | ISO 9001: 2015 Sistema de gestión de la calidad | ISO 56001: 2024 Gestión de la innovación

UNE-EN 14527:2006+ A1:2010 Platos de ducha | NF P05-011 PN24 | AITEX Deslizamiento acabado pizarra, Solidtek y piedra

OUR OWN QUALITY CONTROL LABORATORY:

We have our own laboratory where we carry out quality tests on the parts:

- Anti-slip test according to UNE-EN 14527:2006+ A1:2010 standard.
- Corrosion test.
- Salt spray tests on every batch of metallic and plastic parts. 240 hours.
- Periodic wet and dry cycling tests for all parts. 50 cycles, test duration 1 month.
- Annual tests with chemical agents.
- Tests with cleaning products.
- Rubbing test (5000 cycles) to simulate the maintenance and cleaning of the shower tray.