


AVAILABLE MODELS:

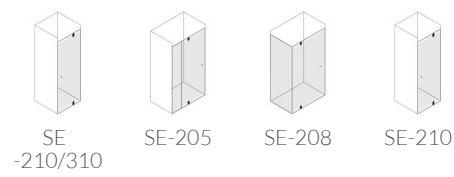

COMMON FEATURES OF THE SERIES:

- Bath and shower screen with pivot-sliding panel for maximum aperture in restricted spaces.
- 6 mm toughened safety glass.
- Profile finishes in Bright Silver and Black.
- Riga knob as standard.
- Low-profile verticals with 20 mm adjustment per side.
- Fitted with non-magnetic contact and magnetic closure.
- With bottom guide rail.
- Reversible door.
- Anti-tip panel system.
- Quick-fit system, wall-mounted without drilling (SE-210 configuration).
- Eco-designed product.
- Stock models available with Teknoclean included.
- Teknoclean included.

FINISHES:

- Anodized profiles in black.

COMPOSITION/MATERIALS:

Profiles:Aluminium. Alloy 6063
Metallic pieces:Zamak, Steel
Chromed plastic covers:ABS
Transparent plastic lids:ABS
Rollers:Steel ball bearings, brass inside track, POM outside track
Seals:PVC

TESTS:

The SERENA collection complies with the European standard EN 14428, exceeding all the tests stipulated therein, as detailed below.

Characteristic to be tested	Assessment method	Compliance criteria	Apt
Cleanability	Visual examination. (4.2)	Free from sharp corners, edges and burrs. (4.2)	✓
Impact resistance / shatter properties	R100, 40 particles minimum. (5.1, 5.2)	Thermally toughened safety glass. (4.3)	✓
Corrosion resistance	240 hours in salt spray. (4.4.2)	Corrosion-proof. (4.4.2)	✓
Resistance to chemicals and stains	Reagents: acids, alkalis, alcohols,bleaches, staining agents. (5.3)	Not showing permanent staining or deterioration. (4.4.3)	✓
Resistance to wet and dry cycling	Wet and dry 50 cycles. (5.4)	Not showing any cracks, crazing or discoloration after 50 cycles. (4.4.4)	✓
Endurance	20.000 closing-opening cycles. (5.5)	Not showing any functional deterioration. (4.4.5)	✓
Stability	Resistance to impact. (5.6)	Resists the impact without any functional deterioration. (4.4.6)	✓
Water retention	Watertightness. (5.7)	Retains water. (4.4.7)	✓

QUALITY CERTIFICATES:



MODEL EXAMPLE:




PRODUCT DATA SHEET

WARNINGS!


- / Maximum height: 1950 mm.
- / Consult the technical detail diagram to avoid interference with faucets.
- / Minimum glass width for Imagik: 250 mm.
- / Custom Imagik available. Consult the technical feasibility of your proposal.
- / Any glass wider than 1200 mm or guides and profiles longer than 2200 mm will incur an additional surcharge due to special logistics. See price surcharges on page 23.
- / No surcharge applies for a bathtub height of 1500 mm.
- / VAT not included.

Technical details

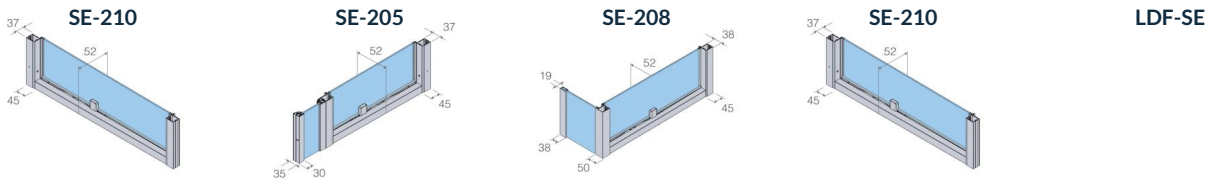

*The plans and dimensions shown correspond to the standard product configuration. Any modification to the configuration may affect these dimensions.

Closing types



Profile with magnetic closure