Zenda


PRODUCT DATA SHEET

profiltek®

COMMON FEATURES OF THE SERIES:


- Extra-flat resin tray with mineral fillers.
- Smooth texture SOLIDTEK®.
- Anti-bacterial and Anti-slip Grade 3.
- Eco-friendly material: ECO resin with 20% recycled PET from recycled plastic bottles.
- Possibility of cut to measure.
- Different grille finishes to choose from. Optional gratings are supplied in the same colour as the shower tray.
- Multiple finishes and options to choose from.
- Mass-colored (except RAL).
- High-flow drain valve included (90 Ø mm.). Q=0,7l/s.
- 3 cm height.

DIMENSIONS (CM):

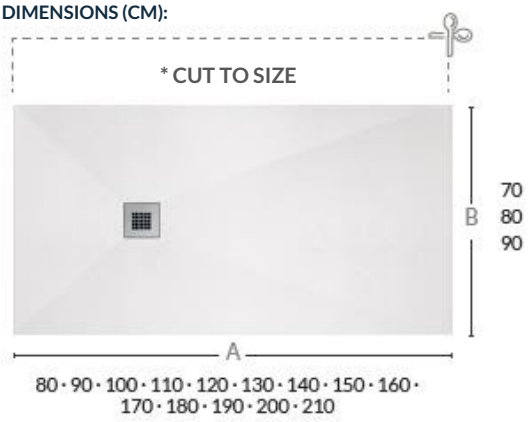

3 cm height | w = 52kg/m2

DRAINS:

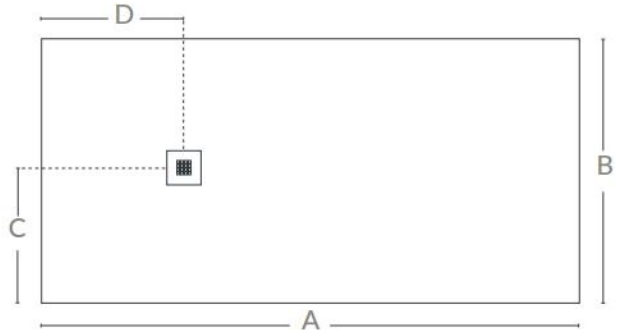

POSICIÓN DEL DESAGÜE · Position de la bonde · Posição do escoamento · Drain position	
A	D
80-120	26*
121-150	36
151-180	46
181-210	61
C	
B/2	

*** On square models the drain position will be centred**

Dimensions in CM

TEXTURES:



Stone

COLOURS:


White · Black · RAL 7040 Grey · RAL 1015 Cream · RAL 7016 Anthracite · RAL 7047 Pearl

RAL 7030 Zinc · RAL 1019 Moka · Optional RAL finish


GRATES:

Resin grating · Stainless steel grating as standard · Optional painted grating

DRAIN VALVE INCLUDED:

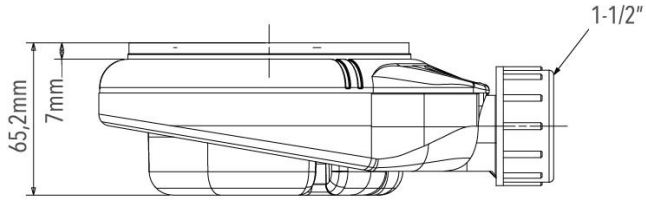

TRAY SECTION:

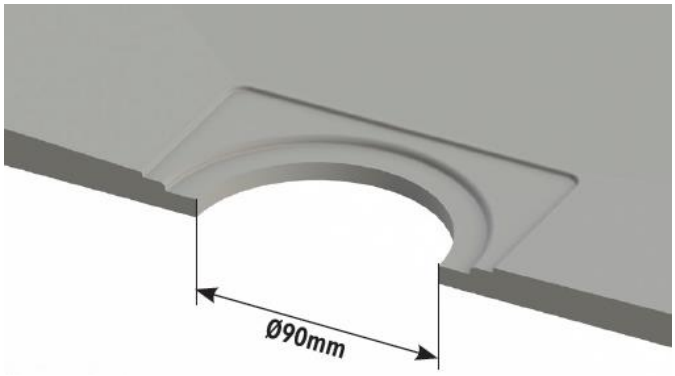

QUALITY CERTIFICATES:

UNE-EN 14428:2016 Mamparas de baño · Declaración de conformidad CE · ISO 9001: 2015 Sistema de gestión de la calidad · ISO 56001: 2024 Gestión de la innovación · UNE-EN 14527:2006+ A1:2010 Platos de ducha · NF P05-011 PN24 · AITEX Deslizamiento acabado pizarra, Solidtek y piedra

OUR OWN QUALITY CONTROL LABORATORY:

We have our own laboratory where we carry out quality tests on the parts:

- Anti-slip test according to UNE-EN 14527:2006+ A1:2010 standard.
- Corrosion test.
- Salt spray tests on every batch of metallic and plastic parts. 240 hours.
- Periodic wet and dry cycling tests for all parts. 50 cycles, test duration 1 month.
- Annual tests with chemical agents.
- Tests with cleaning products.
- Rubbing test (5000 cycles) to simulate the maintenance and cleaning of the shower tray.