


AVAILABLE MODELS:

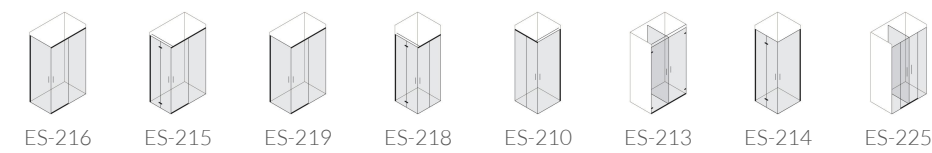

COMMON FEATURES OF THE SERIES:

- Discover our series of special enclosures, where customization knows no limits. From unusual configurations to customization adapted to any style offering made-to-measure solutions that adapt perfectly to the shower space. Versatility and originality come together to create shower enclosures beyond conventional limits.
- Apart from the innovative configurations you'll find in our series of special shower enclosures, we want to emphasize that we are ready to take your ideas to the next level. Do you have a unique project in mind? We love challenges. Whatever your vision is, we're here to bring it to reality.

FINISHES:

- Anodized profiles in white y black.

COMPOSITION/MATERIALS:

Profiles:Aluminium. Alloy 6063
Metallic pieces:Zamak, Steel
Chromed plastic covers:ABS
Transparent plastic lids:ABS
Rollers:Steel ball bearings, brass inside track, POM outside track
Seals:PVC

TESTS:

The SPECIALS collection complies with the European standard EN 14428, exceeding all the tests stipulated therein, as detailed below.

Characteristic to be tested	Assessment method	Compliance criteria	Apt
Cleanability	Visual examination. (4.2)	Free from sharp corners, edges and burrs. (4.2)	✓
Impact resistance / shatter properties	R100, 40 particles minimum. (5.1, 5.2)	Thermally toughened safety glass. (4.3)	✓
Corrosion resistance	240 hours in salt spray. (4.4.2)	Corrosion-proof. (4.4.2)	✓
Resistance to chemicals and stains	Reagents: acids, alkalis, alcohols,bleaches, staining agents. (5.3)	Not showing permanent staining or deterioration. (4.4.3)	✓
Resistance to wet and dry cycling	Wet and dry 50 cycles. (5.4)	Not showing any cracks, crazing or discoloration after 50 cycles. (4.4.4)	✓
Endurance	20.000 closing-opening cycles. (5.5)	Not showing any functional deterioration. (4.4.5)	✓
Stability	Resistance to impact. (5.6)	Resists the impact without any functional deterioration. (4.4.6)	✓
Water retention	Watertightness. (5.7)	Retains water. (4.4.7)	✓

QUALITY CERTIFICATES:



MODEL EXAMPLE:

